


ISTU®-Integrated Standard Transportation Unit



ISTU-technical specification

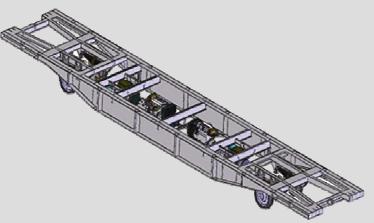

| 0 | Self-guided | vehicle |
|---|-------------|---------|
| | | |

| 0 | Total length | 16400 mm |
|---|--------------|----------|

Width 2737 mm

| 0 | Weight | | ca. 11,0 t |
|---|-----------|--|------------|
| 0 | Axle load | | 22,5 t |
| | | | |

Height of loading surface up 1020 mm

o Max loading 34,0 t


Standard gauge ofWheel diameter1435 mm760 mm


 Loading and unloading by a typical loading equipment


Max. speed 50 km/h
Average speed with loading ca. 10 km/h

Average speed with loading ca. 10 km/n
 Diesel-Generator set

IPMOT drive 2

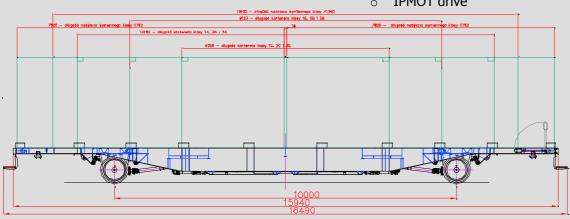



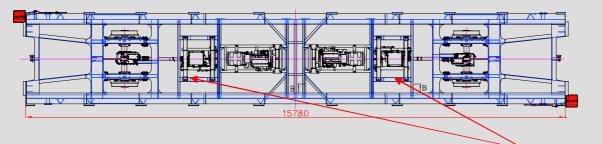

ISTU-load specification

- o 1 container class A, B or C, of a gross weight of 34 t or
- o 1 swap body class A, of a gross weight of 34 t or
- o 1 swap body class C of a gross weight of 16 t or
- o 2 swap bodies class C each of a gross weight of 16 t.

IPMOT

Integrated Propulsion Motor Unit fully integrated PLUG and PLAY drive solution



www.itaps.eu